

NEW



www.faacgroup.com

FAAC

Faac spa

Via Benini, 1 - 40069 Zola Predosa (BO) - Italy
Tel. +39 051 61724 - Fax. +39 051 758518 - info@faac.it

jack burrowsky



S700H

Underground hydraulic operator (24V) for swing gates
with single leaf max length 4 m and single leaf max weight 800 kg

FAAC

S700H

Underground hydraulic operator (24V) for swing gates
with single leaf max length 4 m and single leaf max weight 800 kg


Two handles
help to install

Positive Stop
Integrated


Integrated bus
rotating magnetic
encoder

24V Electric
Motor

Hydraulic release
device

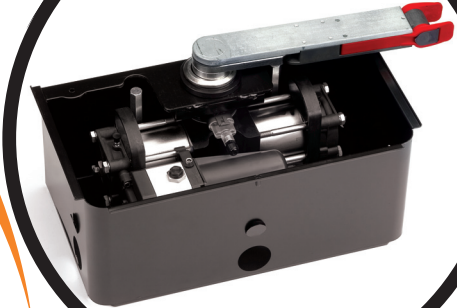

- > Cataphoresis treated self-supporting steel box (welding to pillars allowed)
- > Stainless steel cover
- > Independent transmission system

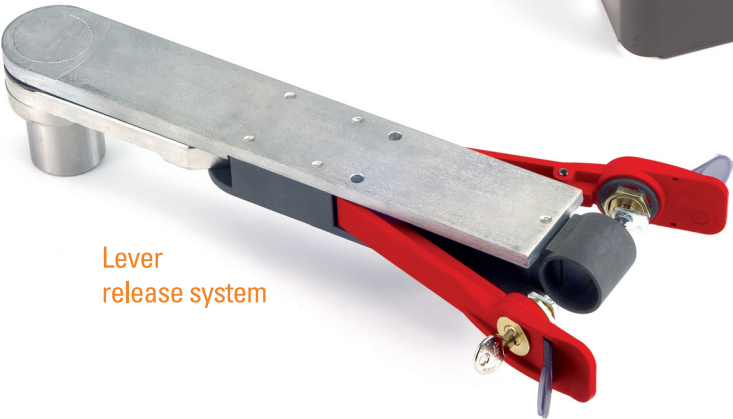


Lever
release system



CONTROL BOARD E024



- > Functions programming through leds and push-buttons
- > Bus-controlled "Encoder" management (speed, end travel deceleration, anti-crushing function - EN standard)
- > Electric lock management
- > Hydraulic 24 V technologic solution to integrate the advantages of both technologies: solidity, performances, reliability, silence, speed control, anti-crushing security,...

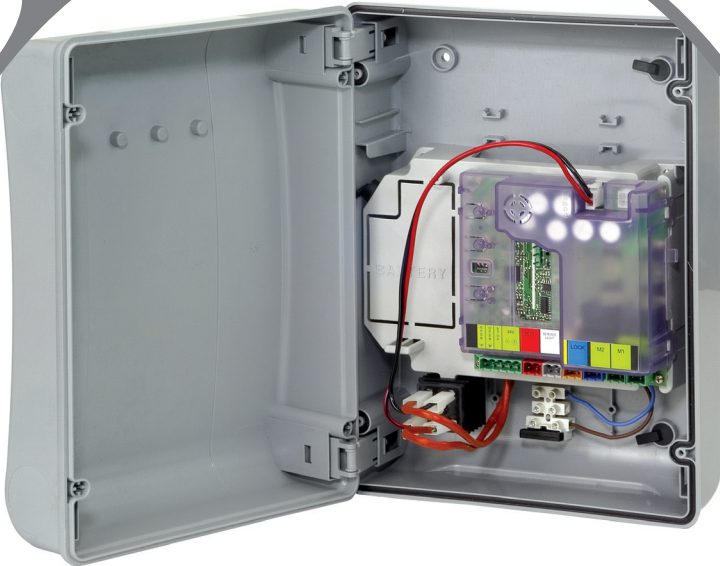

TECHNICAL SPECIFICATIONS	CBAC Operator	SB Operator
Power supply	230 Vac	
Absorbed power	120 W	
Electric Motor	24 Vdc	
Work frequency	50 hz	
Protection class	IP 67	
Type of oil	FAAC HP OIL	
Operating ambient temperature	-20° C ÷ +55° C	
Use Frequency	100%	
Hydraulic shut-down facility	Supplied	Not supplied
Pump flow-rate	0,5 l/min	
Max torque	575 Nm	
Angolarspeed	4,8 °/sec	
Max opening angle	110°/180°	
Type of slow down	Electronic	
leaf max length	1,8 m	4 m
Leaf max weight	800 kg	